

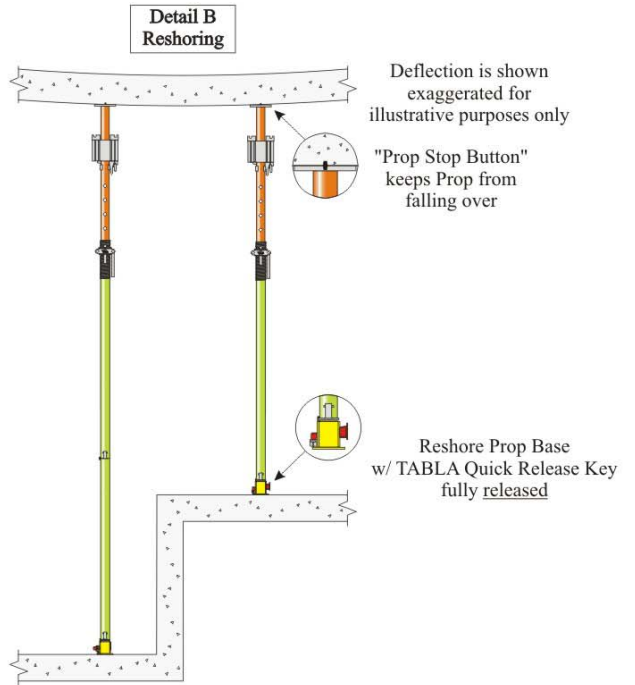


# TABLA G2 SHORING

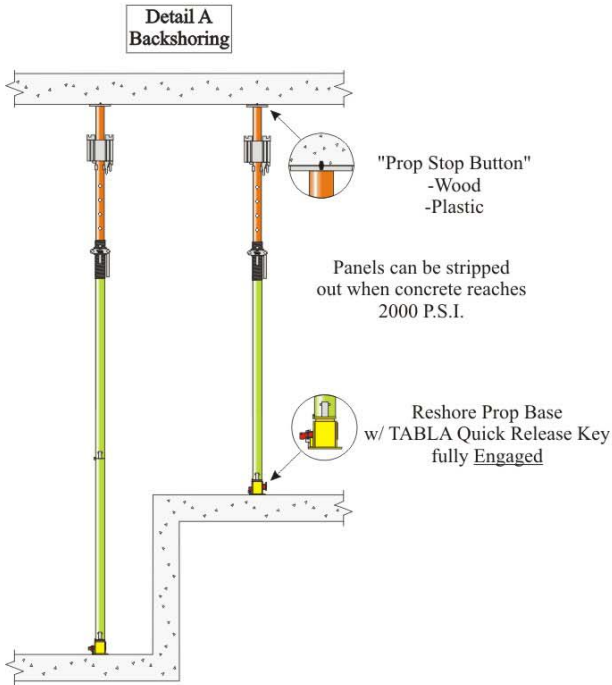


**Prop Loads On Backprop & Reshore Prop For 8'x4'/2400x1200 Grid**

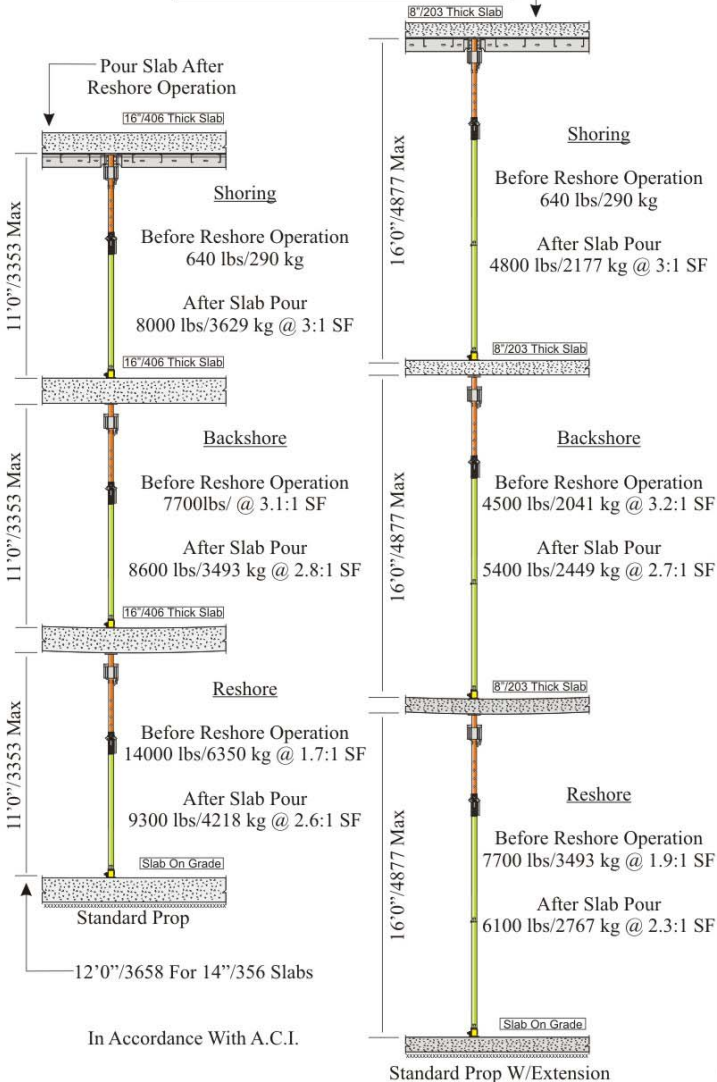


## Reshore Procedure - Step By Step




- Using carpenter hammer release latch

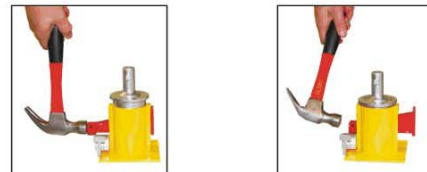

- Strike release key and drop prop 1/4": 6mm on entire level of props and relieve all or most of the load

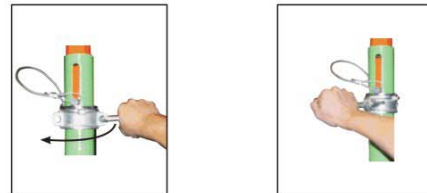

- If slab deflection does not allow prop to become "loose", back down collar until prop is loose

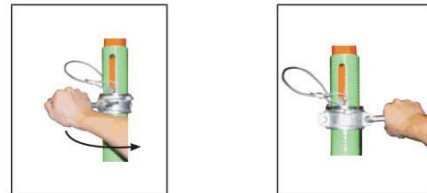

- After entire level of props are "loose" and slab has been allowed to accept its self weight, snug up props by turning collar